ENFORCER® Access

Electromagnetic Lock with Weldable Brackets for Gates

- **Weld or Bolt to Gate**
- **4 Knockouts on Junction Box**
- **Corrosion-Resistant Finish**
- **Water and Vandal Resistant**

E-942FC-600SQ

Electromagnetic Lock with brackets for armature and magnet.

E-942FC-600

Electromagnetic Lock only.

Features:

- For outdoor sliding and swinging electric gates.
- Brackets can be welded or bolted directly to gate.
- Brackets are zinc-plated for corrosion resistance.
- Brackets have black finish to match most gates.
- Lock is water and vandal resistant.
- Lock has attractive stainless-steel finish.
- Maintenance-free, factory-sealed design.
- Holding force - 600 pounds.
- Prewired for 12VDC operation.
- Adapter and mounting hardware included.

Technical Specifications:

	E-942FC-600SQ
Operating Voltage	12VDC or 24VDC
Holding Force	600 lb. (271 kg)
Current Draw	500mA/12V, 250mA/24V
Weight (Approx.) Total Maglock & Armature Bracket	 10.35 lbs. (4.7 kg) 6.4 lbs. (2.9 kg) 3.95 lbs. (1.8 kg)
Certifications	cUL, UL, CE (magnetic lock only)

Dimensions:

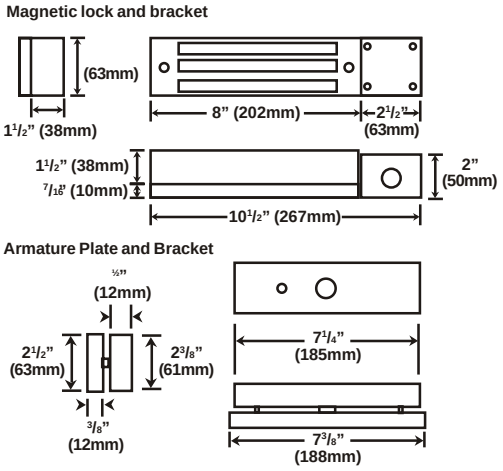

Installation:

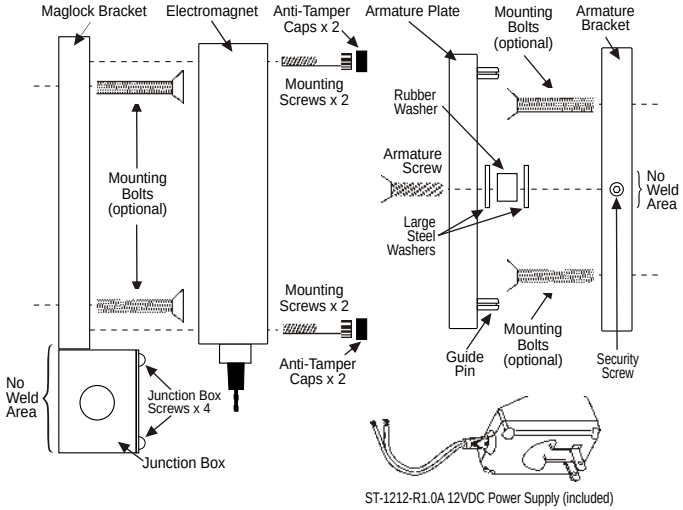

Copyright 2007 SECO-LARM U.S.A., Inc. All rights reserved.
The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change prices and specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM®
16842 Millikan Avenue, Irvine, CA 92606
1.949.261.2999 (CA & Int'l) 1.800.662.0800 Fax: 1.949.261.7326
Email: info@seco-larm.com Website: www.seco-larm.com

GateLockg.cdr